



Search...



Fast Answers. Expert Guidance TALK TO AN IKAN PRODUCT SPECIALIST

HOME / LOJA / TELEPROMPTERS / TELEPROMPTERS DE VIDRO BEAMSPLITTER

FILTER



TELEPROMPTER PROFISSIONAL DE 19 POL. COM DIVISOR DE FEIXE DE ALTO BRILHO E KIT DE MONITOR DE TALENTOS

\$3.949,00**Modelo: PT4900-TM-V2**

- Teleprompter profissional de 19"
- Inclui monitor de talentos SDI Widescreen de 19" com luzes de contagem
- Entradas HDMI, Componente e VGA
- Monitor de teleprompter de alto brilho de 1000 nits
- Vidro divisor de viga 65/35 de alta qualidade fabricado nos Estados Unidos
- Tela legível de até 25"
- Várias opções de montagem de câmera
- Fácil balanceamento com base ajustável
- Design leve e compacto
- Enviado em espuma reutilizável para fácil transporte
- O monitor suporta inversão de imagem
- O software PrompterPro para MAC e PC é GRATUITO com este Teleprompter

Variações

[SOMENTE TELEPROMPTER](#)[TELEPROMPTER COM MONITOR DE TALENTOS WIDESCREEN](#)[TELEPROMPTER COM KIT DE VIAGEM](#)[SOMENTE TELEPROMPTER SDI](#)[TELEPROMPTER SDI COM MONITOR DE TALENTOS WIDESCREEN](#)[TELEPROMPTER SDI COM KIT DE VIAGEM](#)**Em estoque**

Transferências

Guia de início rápido: [PT4900-TM-V2 - Guia de início rápido](#)Certificado: [UKCA](#)Certificado: [CE](#)

SKU: PT4900-TM-V2

Categorias: Teleprompters de vidro Beamsplitter , Estúdio/Transmissão , Teleprompters

[VISÃO GERAL](#) [ESPECIFICAÇÕES](#)



PT4900-TM-V2

A série de teleprompter profissional da Ikan foi projetada para uma configuração rápida e fácil para trabalhar com eficiência em aplicações de estúdio ou transmissão. O teleprompter inclui um vidro reflexivo 65/35 que torna o reflexo mais fácil de ver para o apresentador. O teleprompter leve de alumínio tem várias roscas de 1/4-20" e 3/8-16" para montagem em um tripé ou pedestal. O monitor inclui entradas de vídeo HDMI, Composite e VGA. Sua tela de alto brilho garante visibilidade clara em qualquer condição de iluminação. Um botão intuitivo de inversão de imagem permite fácil ajuste da orientação da tela. Este kit de teleprompter também possui um monitor de talentos SDI widescreen de 19" com uma luz de contagem integrada.

FÓRMULA PROPRIETÁRIA PARA VIDRO E REVESTIMENTO

O vidro é revestido de modo que reflita 65% da luz projetada nele, enquanto permite que os 35% restantes passem. Essa característica única permite que o apresentador leia o texto do roteiro refletido claramente, projetado de um monitor abaixo ou atrás do vidro, enquanto simultaneamente permite que a câmera posicionada diretamente atrás do vidro grave através dele sem capturar o texto refletido.



GRANDE VARIEDADE DE COMPATIBILIDADE DE CÂMERAS

Nossa linha profissional de teleprompters inclui três bases de montagem de câmera diferentes, tornando-a compatível com uma ampla variedade de câmeras, como câmeras ENG profissionais, câmeras de cinema, câmeras sem espelho e filmadoras.

Altura das placas de elevação:


Grande – 135 mm/5,31 polegadas

Curto – 52,5 mm/2,06 polegadas

DLSR – 160 mm/6,29 polegadas

MONITOR TELEPROMPTER VERSÁTIL

O monitor de 19 polegadas possui entradas HDMI, Composite e VGA. A resolução nativa é 1280 x 1024 e o brilho máximo é 1000 nits. O menu de ajuste do OSD permite ajustes de contraste, brilho, luz de fundo, matiz, croma, nitidez. Você também pode ajustar a intensidade de cada canal de cor RGB. A proporção da tela pode ser definida como 16:9, 4:3, full ou pode ser definida para detectar automaticamente a proporção da tela e defini-la adequadamente.

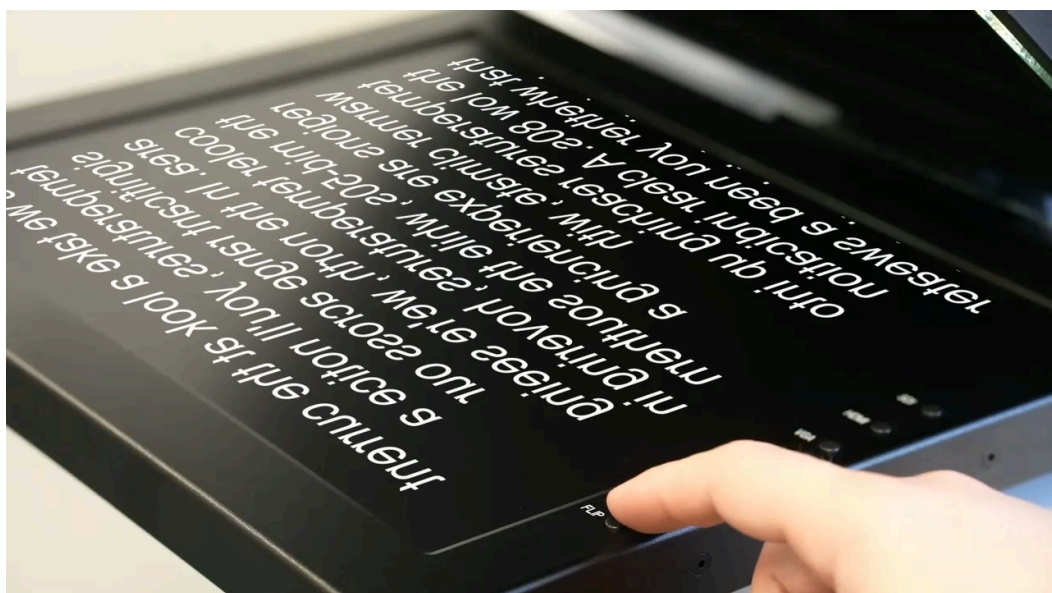


BOTÃO DE INVERSÃO DE IMAGEM

O monitor possui um botão de inversão de imagem que permite a inversão horizontal e vertical da imagem exibida. Esse recurso é ideal para apresentadores que estão em videoconferência, pois permite que o apresentador se veja como se estivesse olhando para um espelho, dando uma sensação maior de conforto durante a videoconferência ou transmissão ao vivo.

TELA DE ALTO BRILHO

A tela de alto brilho de 1000 nits é capaz de fornecer visibilidade de texto clara e vívida em várias condições de iluminação. Em ambientes com iluminação intensa, como ambientes externos ou estúdios bem iluminados. Esse recurso é particularmente vital para teleprompters externos, onde a luz do sol pode desbotar a exibição de um monitor padrão.

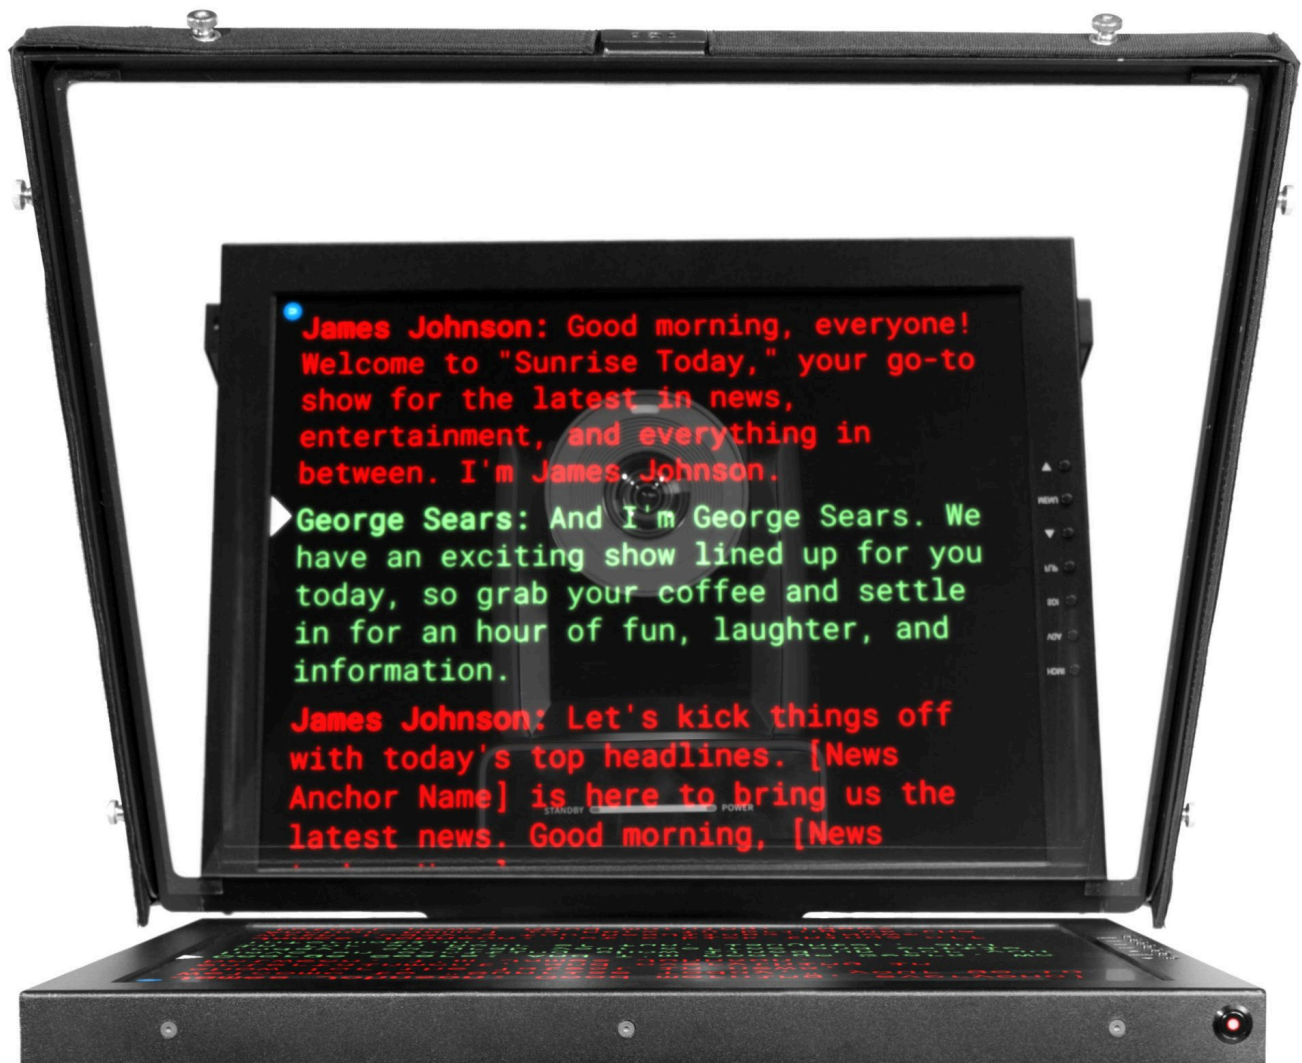



CHASSI DE ALUMÍNIO

O invólucro de alumínio personalizado é robusto e protegerá o monitor dos rigores da produção. O monitor possui botões montados na moldura, facilitando a navegação pelas funções do menu ou a alteração da fonte de entrada.

FÁCIL DE EQUILIBRAR

The 19-inch Teleprompter includes a rail that allows you to easily balance your entire teleprompter setup so that you don't need a counter weight. The teleprompter can be offset along the sled



WIDESCREEN TALENT MONITOR

The 19-inch Widescreen Talent Monitor is designed to conveniently attach below the teleprompter to enable on-screen talent see their presentations live. The monitor features 3G-SDI, HDMI, and VGA, inputs. The native resolution is 1920 x 1080 HD and max brightness is 1000 nits. The OSD adjustment menu allows adjustment for contrast, brightness, backlight, tint, chroma, sharpness. You can also adjust the intensity of each RGB color channel. Aspect ratio can be set as 16:9, 4:3, full, or it can be set to automatically detect the aspect ratio and set it accordingly. When plugged into a compatible video switcher, the talent monitor utilizes a red/green tally light that lets you know when your camera is live. The talent monitor includes a 15mm mounting system that connects it to the teleprompter.



BUILT-IN TALLY LIGHT FOR ON AIR STATUS

The widescreen talent monitor features a tally light that illuminates red, green, and yellow. This means that a director can cut between cameras and the tally color will let the on-camera talent know which camera is live. Yellow tally lights are typically used as a way to signal to the talent, crew, and director that a camera is about to go live, and to be ready for the shot. A green tally light is typically used to indicate that a camera is in preview mode. This means that the camera's output is being sent to a monitor, but it is not currently on air. This allows the talent, director, and production crew to check the composition, focus, and other aspects of the shot before it goes live. A red tally light is used to indicate when a camera is live or on-air.

DUAL TALLY LIGHTS

The talent monitor can be mounted as either a talent monitor or a script monitor. The monitor features a toggle switch that allows you to choose which of the two tally lights you would like to use depending on which setup you decide to choose.



TALLY LIGHT SELECTOR



ULTRA-SECURE HOOD

The hood of the teleprompter is anchored to the frame with bolts and additionally secured with magnets for extra stability.




COMPATIBLE WITH BIGGER LENSES

The teleprompter hood for the PT4900-V2 features a much wider opening allowing some of the biggest lenses available to be used.







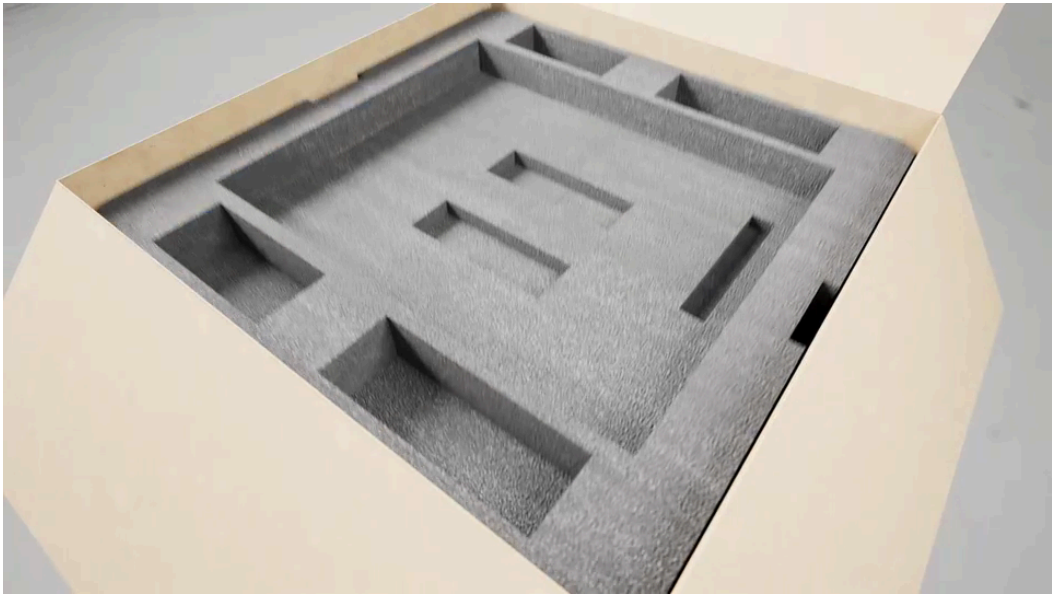









SHIPS IN REUSABLE FOAM

The professional teleprompter is shipped in reusable custom cut foam which will help keep the kit safe and organized when you set it up or break it down. The custom cut foam fits perfectly fit in the optional Ikan [PT-CASE-4U](#) rolling hard case



TELEPROMPTER COMPARISON CHART

SKU	PRODUCT IMAGE	MSRP	MONITOR SIZE	MAIN MONITOR ASPECT RATIO	SDI MAIN MONITOR	NDI MAIN MONITOR	FEATURES TALLY LIGHT	INCLUDES PROMPTING SOFTWARE	INCLUDES HARD CASE	INCLUDES TALENT MONITOR	NDI TALENT MONITOR
PT4900-V2		\$2,399.00	19"	4:3				✓			
PT4900-TM-V2		\$3,399.00	19"	4:3			✓	✓			
PT4900-TK-V2		\$2,699.00	19"	4:3				✓	✓		
PT4900S-V2		\$2,499.00	19"	4:3	✓			✓			
PT4900S-TM-V2		\$3,499.00	19"	4:3	✓		✓	✓		✓	
PT4900S-TK-V2		\$2,899.00	19"	16:9	✓		✓	✓	✓		
PT419W		\$2,799.00	19"	16:9	✓		✓	✓			
PT419W-TM		\$2,599.00	19"	16:9	✓		✓	✓		✓	
PT419W-TK		\$3,599.00	19"	16:9	✓		✓	✓	✓		

PT4700-V2		\$2,199.00	17"	4:3			✓	✓			
PT4700-TK-V2		\$2,499.00	17"	4:3			✓	✓	✓		
PT4700-TM-V2		\$2,899.00	17"	4:3			✓	✓		✓	
PT4700S-V2		\$2,299.00	17"	4:3	✓		✓	✓			
PT4700S-TK-V2		\$2,599.00	17"	4:3	✓		✓	✓	✓		
PT4700S-TM-V2		\$3,199.00	17"	4:3	✓		✓	✓		✓	
PT4500-V3		\$1,999.00	15"	4:3			✓	✓			
PT4500-TM-V3		\$2,899.00	15"	4:3			✓	✓		✓	
PT4500-TK-V3		\$2,299.00	15"	4:3			✓	✓	✓		
PT4500S-V3		\$2,099.00	15"	4:3	✓		✓	✓			
PT4500S-TM-V3		\$1,899.00	15"	4:3	✓		✓	✓		✓	
PT4500S-TK-V3		\$2,399.00	15"	4:3	✓		✓	✓	✓		
PT415W		\$2,199.00	15"	16:9	✓		✓	✓			
PT415W-TK		\$2,499.00	15"	16:9	✓		✓	✓	✓		

- What's Included:**
- 1x Teleprompter Base
 - 1x 19 in. Teleprompter Monitor
 - 1x 19 in. SDI Widescreen Talent Monitor
 - 1x Tall Riser
 - 1x Small Riser
 - 1x DSLR Riser
 - 1x Teleprompter Hood
 - 1x Teleprompter Glass
 - 1x Warranty Card
 - 2x Power Supply
 - 1x Prompter Pro 4 Digital Download

Teleprompter Base System

Riser Plate Height	Short: 2.06 in./52.5mm Tall: 5.31 in./135mm DSLR: 6.29 in./160mm
Length of Rods	15mm x 400mm
Build Material	Chassis: Anodized Aluminum Rods: Carbon Fiber
Reading Range	25 ft. / 7.62 m

Beamsplitter Ratio	65/35
Beamsplitter Shape	Rectangular
Beamsplitter Material	Glass
Tripod Mounts	11 x 1/4 in. -20 Female 9 x 3/8 in. -16 Female
Weight of Teleprompter Base	16 lbs
Weight of Low Plate	1 lbs.
Weight of High Plate	1.38 lbs.
Weight of DSLR Plate	0.748 lbs.
Height of Teleprompter	16.1 in./ 411mm
Country of Origin	Taiwan

19 in. Teleprompter Monitor

Aspect Ratio	4:3
Maximum Brightness	1000 cd/m2
Screen Size (Diagonal)	19 in.
Mount	VESA 100mm
Video Inputs	AV COMPOSITE, HDMI, VGA
Input Voltage	DC 12v / 4A
Power Consumption	21W
Product Weight	6 lbs.
Product Dimensions	17 in. x 15 in. x 1 in.
Native Resolution	1280 x 1024
Viewing Angle	160° (H) / 170° (V)
Build Material	Aluminum Chassis
Image Flip	Horizontal: Yes Vertical: Yes

19 in. Widescreen Talent Monitor

Aspect Ratio	16:9
Maximum Brightness	1000 cd/m2
Screen Size (Diagonal)	18.5 in.
Mount	VESA 100mm
Video Inputs	SDI, HDMI, VGA
Input Voltage	DC 12v / 5A
Power Consumption	36W
Weight of Monitor	5.73 lbs.
Product Dimensions	18.3" x 12.3 x 1.2"
Native Resolution	1920 x 1080
Viewing Angle	178° (H) / 178° (V)
Build Material	Aluminum Chassis
Image Flip	Horizontal: Yes Vertical: Yes
Tally Interface	RJ45

Talent Monitor Mount

Mounting System	15mm Rod, 100mm VESA
Length of Height Adjustment	1.2 in.
Weight of Mounting Bracket	1 lbs.
Dimensions of VESA Mount	6 x 9.5 x .5 in.
Dimensions of 15mm Mount	5 x 5.2 x 1 in.

Quick Start Guide: [PT4900-TM-V2 - Quick Start Guide](#)

Certificate: [UKCA](#)

Certificate: [CE](#)

UPC Code: 847983036042

Total Weight of Teleprompter: 30.11 lbs.

WEIGHT	46 lbs
DIMENSIONS	26 x 26 x 17 in

No videos available at this time.